



PRO SERIES TIG 200P AC/DC Pulse Digital




ORDER CODE
JT-202D

ORDER CODE
JT-202D-WC

COMPLETE WITH
TIG torch & adaptor, Work return lead & clamp

5 Year Warranty*

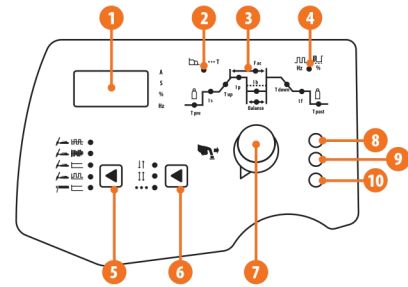

- | | |
|------------------------------------|-------------------------------|
| 1 Digital Display | 6 2T/4T/Spot Selection Switch |
| 2 Arc Force/Spot Time Indicator | 7 Multi Function Control Dial |
| 3 Welding Parameter Area | 8 Local/Remote Indicator |
| 4 TIG Pulse Options Indicator | 9 Tungsten Indicator |
| 5 Welding Process Selection Switch | 10 Parameter Alarm Indicator |

The Jasic 202D Pulse AC/DC is a technologically advanced single phase inverter power source suitable for medium production work. The innovative and user friendly digital control panel allows full control of welding parameters. Optional water cooler and large cylinder trolley available.

The excellent technical characteristics of the 202 AC/DC make it an ideal choice for professionally qualified TIG welders that require precise and reliable performance.

KEY FEATURES

- TIG Pulse AC/DC with digital control
- 43 KHz inverter frequency and strong shock resistance IGBT
- Program memory storage
- Peak current control, 2T/4T
- Pre-post flow time, up/down slope
- Pulse adjustment
- Pulse frequency, pulse duty, arc force, cleaning width
- Remote control interface
- AC function for aluminium and aluminium alloys
- DCTIG function for carbon steel, copper and non-ferrous metals
- Smooth arc and stable welding performance
- Heavy duty 35/50 dinse sockets
- MMA remote capability
- VRD Function
- AVR generator friendly

TECHNICAL DATA

	JT-202D	JT-202D-WC
Input Voltage	AC 230V - 50/60 Hz	AC 230V - 50/60 Hz
I _{eff} (A)	20	20
Input Power (kVA)	6.9	6.9
Current Range (A)	TIG 5 - 200 MMA 10 - 160	TIG 5 - 200 MMA 10 - 160
Duty Cycle @ 40°C	TIG 200A @ 25% MMA 160A @ 30%	TIG 200A @ 25% MMA 160A @ 30%
No-Load Voltage (V)	65 (7V VRD)	65 (7V VRD)
Protection/Insulation Class	IP21S/B	IP21S/B
Dimensions (LxWxH mm)	566 x 224 x 405	940 x 420 x 1130
Weight (Kg)	15	70

